




General features

Description:	LED floodlight fixture
L70/L90	>200,000H / >60,000H
Nominal Voltage:	100-277VAC or 277-480VAC
Protection Level:	IP66 & IK08
Power factor:	>0.9 at full load
Ambient temperature:	-40°C - +50°C
Weight	12.3kg
Exposed Side Area:	0.07m ²
Surge Protection:	Imax 20KA
Driver:	Meanwell / Inventronic
Labels and Certification:	ENEC / CE +
Warranty:	10 Years

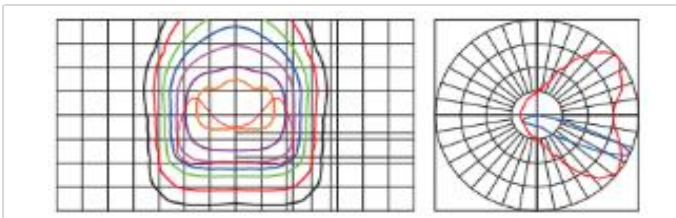

Performance Data:

Power Supply:	1400mA
Flux Fitting	61071lm
Power Fitting:	472.4
Efficacy of Fitting:	129.28
Control Types:	STD / DALI / RF / ZIGBEE

Installation & Maintenance:

Installation :	Side / Post Top or Wall Mount
Column Diameter:	60mm
Inclination:	5 Degree adjustments +/- 180
Power Cable:	8 Cores + Earth
Gland Type	M30 Stainless Steel 316
Wiring Fixing:	Puch Fit Connectors

Materials:

Body:	Extruded Aluminium
Screen:	PMMA Patented Optic lenses
Lenses	12No types of Optics
Fastening System	Stainless Steel Screw System
Coating Thickness:	100µm
Finishing:	Powder coat, Corrosion resistant